

MASSAGE BATHTUB

MODEL: EMPV-75JT901



Introduction

In order to use our products safely and effectively, please read this instruction carefully. Improper installation, operation and maintenance will cause the damage to the products and charge you extra repairing fee.

- —Thank you for you to choose our massage bathtub series;
- —We provide a lifetime warranty after-sale service, please fill warranty registration form accurately:
- —If you need any help, please contact local distributor or our company directly:
- —Our company reserve the right to change all the models listed in this instruction without prior notice;
 - —This instruction applies to the listed products as below
- —Because of the difference of the market requirement and individual custom product, please refer to the corresponding content in this instruction according to the product and its functions you choose. In this way, you can install and operate the product correctly.
- In order to install the product correctly and safely by the installer, and you can use and maintain this product correctly and safely, please pay much attention to the warning sign as below

The warning symbol's meaning is as below:



This symbol indicates that errant handling after disregarding this symbol could result in personal injury or property loss.

- In order to install, use and maintain this product correctly and safely, please read and understand this instruction totally.
- This instruction is a valuable source of product information to help the end user use the product safely and correctly. Please take good care of it and keep it from getting lost or soiled.

Preparation before installation

- Make sure the place you install the bathtub is strong enough to bear the total weight of bathtub, maximum water volume and the user
- Waterproofing process must be made in the place of bathtub installed, or down stair will get damaged if water leaks.


- The installed place must equip with water supply, power supply and drainage:
- This product uses universal home power.



*External circuitry need to equip with high sensitive and fast type leakage protection switch. (Induced current rating below 15MA, trip time should less than 0.1 second, rated current is above 30A.)

The product should be installed the grounding and electric leakage switch by a qualified licensed electrician.

- Please reserve the drainage hole≥ø50mm, make sure the drainage pipes accord with the water valve.
- User need to reserve the connectors of 1/2" external thread cold/hot water hoses, which outstand the wall 30mm. It is suggested to install a valve in each pipe, the location of installed should be designed by user, which is convenient for maintaining
- As each bathroom or power and drain of each bathtub is slightly different, please place the bathtub according to the actual situation, the following illustration as a reference layout:

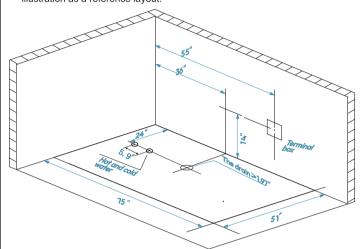

The safe distance between power supply and water supply should be not less than 30cm.

Precautions for installation

- Please check whether all parts are complete. If you have any question, please give feedback to our company in time
- After opening the box, please immediately dispose of unneeded packaging. Or it may cause the personal injury by the wooden frames, nails, cardboard or sealing straps which are placed carelessly.
- In addition, please do not let the children to play with the packing material. Or it will cause personal injury.
- Parts containing live parts, except parts supplied with safety extra-low voltage not exceeding 12 V, must be inaccessible to a person in the bath
- Earthed appliances must be permanently connected to fixed wiring
- Parts incorporating electrical components, except remote control devices, must be located or fixed so that they cannot fall into the bath
- Please do not use other power, except specified power Or it may cause fire or electric shock.
- Electrical leakage protection switch should be installed outside the bathroom. Or it may cause fire or electric shock

Notice

- Do not use the broken power supply, power plug or the loose socket. Or it may cause fire or electric shock.
- Do not modify the power supply cord, use it with an extension cord or combine it with other equipment using multiple plugs.


Doing so could lead to shocks, overheating or fire.


Please make sure the power plug is waterproof protection with silicon. Or it may cause fire or electric shock by water infiltration



- Before the installation finish, please use cardboard to protect the bathtub or it may lead the damage of the
- Do not put the fire on the bathtub, such as a lighted cigarette, or it may lead the damage of the bathtub.
- Do not stand on bathtub while working. Doing so could cause one to slip and fall or could otherwise damage the product
- Install securely, in accordance with the Installation Manual Improper installation can lead to water leaks that damage or ruin household property.
- After finish the installation, the product should go into trial operation fully to check the installation is proper or not

Size chart



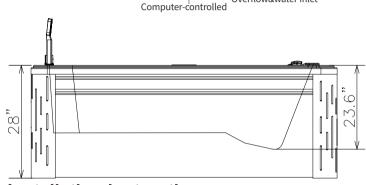

Installation instruction

Inspection before installation

Although all our massage bathtub are water tested before they leave our factory, there may be some loose of the hose connections due to the transport. We need water test the product before installation. The steps are as follows


- a. Place the tub on a flat surface in an area where it may be drained after testing. And adjust the feet to make the bathtub level;
- b. Check if there is any loose of all the connection system
- c. Close the door fill the tub with water to the overflow and allow standing for 10 minutes to inspect the tub for leaks:
- d. Insert the plug, start all the function for few minutes (which includes the functions of massage), inspect the tub completely any defect must be reported to your dealer/distributor prior to installation in order to have it covered under warranty.

Adjust the leveling feet

According to different sizes bathtubs, we design about several leveling feet to adjust the bathtub. Please use a wrench or level ruler to level the

Note: If the bathtub is not level, it may lead: - noise increased;

-remaining water in the hoses or the drainage;







Installation instruction

• How to connect the water?

For ease of use, our bathtub is equipped with stainless steel cold and hot water hoses (connector @ 1/2"). Please connect the cold and hot water hoses to the bathroom's cold and hot water hoses accordingly.

Before connect bathtub water inlet pipe, first open water pipe for a period of time, then put filter screen to ensure that the debris will not enter the bathtub pipe. So that we can effectively extend the life of the fitting.





The drain pipe is 31.5" long and the ground drain should be 12" – 20" away from the bathtub drain so that the drainpipe can form an S-bend for odor isolation

Insert the drain-pipe to the drain-hole on the floor, and then cover it with water retaining cover to prevent waste water spilling.

cold water hose:

Drain-pipe should be installed with slope above 1:50; Notice Do not hold the drain-pipe and cold/hot water hoses when moving the bathtub, and do not crash it with hard objects.

How to connect the electricity? User needs to purchase two separate 110/120V 15amp plugs and install the proper dedicated plug with a ground electrode to the power line. Then insert the plug frmly. Note: This product uses universal home power External circuitry is equipped with high sensitive and fast type leakage protection switch. (Induced current rating below 15MA; trip time should be less than 0.1 second; rated current is above 30A.)



The product should be installed alongside ground and electric leakage switches by a licensed electrician.

Make sure the ground is connected. One side of the ground should be connected to the ground terminal of the motor and the stainless steel

frame: the other side should be connected to

the around wires of the plua







Notice

The bathtub must be connected to the ground The power outlet must be sealed well. Notice Make sure the surface of each wire is intact.


Precautions for use

- This instruction is for the massage bathtub series, not just for a certain model. Please refer to the model and configuration you choose when using the product.
- •Use this unit only for its intended use as described in this manual Do not use attachments not recommended by the manufacturer.
- Children shall not play with the appliance
- •Cleaning and user maintenance shall not be made by children without supervision.

 • Do not permit children to use this unit unless an adult closely
- supervises them at all times. Supervision is also required when an elderly or handicapped individual uses whirlpool bath.
- •For the early months of pregnancy, pregnant or possibly pregnan women should limit whirlpool water temperature to 100°F(38°C), because the excessive water temperatures have a high potentia for causing fetal damage
- · Person with a medical history of heart disease, low or high blood pressure, circulatory system problems or diabetes should consult a physician before using a whirlpool.
- The use of drugs or alcoholic beverages before or during whirlpoo use may lead to unconsciousness with the possibility of drowning
- The water in a whirlpool should never exceed 104°F(40°C). Wate temperatures between 100°F(38°C) and 104°F(40°C) are considered safe for a healthy adult. Use time should be limited to approximately 30 minutes, followed by a shower to cool down. Lower water temperatures are recommended for extended use (exceeding 10-15 minutes) and are definitely recommended for
- headache, get out at once and cool down. Get medical attention symptoms persist. Check with a physician before using whirlpool again.
 • Persons using medication should consult a physician before using a whirlpool since medication may induce drowsiness while other

vounger children. If you become nauseous, dizzy or develop a

- medication may affect heart rate, blood pressure and circulation. The thermostatic mixer can maintain the temperature of the water input, please use carefully according to the operating instruction to avoid the scald or catch a cold.
- Do not operate this unit without the suction cover over the suctio fitting. This suction cover is a safety device that reduces the potential hazard of hair or body entrapment. Keep hair and body
- away from suction cover when the pump is running.
 Never drop or insert any object in any opening within the whirlpoo Never operate electrically connected devices in or near the bath. No electric appliances should be within 5 feet/1.5 meters of this bathtub (such as hair dryers, lamp, telephone, radio, television




PRODUCT FUNCTION:

- It is made of transparent plastic cover, dynamic LCD display. touch screen control, it works convinient
- Computer auto detecte water level
- Massage function 3. Bubble bath
- 4. Phone dialing and answering 5. High sensitive FM radio system with 20 preset channels, channel selection au-
- tomatically and so on. 6. Ozone sterilization
- Preset heating and constant temperature device(20°C-45°C adjustable)
- 8. CD input
- 9. Underwater lam
- 10 Rinsing system
- 11 \ Infrared ray control

TECHNICAL DATA:

- 1. Supply voltage: AC190V-240V 50-60Hz
- 2. Water pump power: AC220V 750W 3. Air pump power: AC220V 750W
- 4. Heater power: AC220V 1500W
- 5. Dielectric strength: 1500V 1Min
- E. SYSTEM WIRING DRAWING
- 6. Electricity leakage: < 0.25m A
- 7. Ozone: AC 12W 8W
- 8. Water lamp voltage: AC12V 20W 9. Electromagnetic valve: DC12V 8W
- 10. Music power: <15W
- 11. Frequency range: FM88--108MHz
- 12. S/N radio: >45dB
- 13. Water proof scale: IPX4



四、CONTROL PANEL FUNCTION DESCRIPTION:



REMOTE CONTROL USE

1, heater on/off Manually/auto select
2, long press to set channel
temperture Mp3/BT select tracks
pump 1, underwater lamp on/off **-®®** ⊕ - FM channel memory _ • • - FM upward ₩ **⊕**

六、OPERTATION DESCRIPTION :

. Massage section:

(1)The operation of system be on or $\mathfrak{g} \mathfrak{e} \mathfrak{f}$ through the leakage plug, then press the main switch Power on.

At the same time ,also in the left corner of it will show the present water temperature (10-50°C), but system will show the sett38 % is All can be worked as user's need . Press main swatch, then close

(2) recycle pump : press , rec**stalrt.obisplay show** and stop auto after 60mins. (This function control by water level,

recycle run need water meet requirement recycle pump.) (4) Heater function: 1.:If only start the water pump, press 🍙 then the heater works. The hea ter will be closed when water pump closed.

Heater is clontrolled by temperature setting, when water temperature is lower than the temperature your setting, it works normal, extstyle ehigher or the same as the temperature your setting, it will be non-work (constant tem pteraure).
will be shown. During constant temperature, water temperature must be 2°C lower than the temperature your setting then can be work again.

Note: After heater function start, recycle pump will always work without limit by time and temperature.

Temperature setting: long press 👔 to change pre-set temperature
The range of temperature setting: 20°C-45°C

The range of temperature show:10°C-50°C

(4) Water pump; press 🔯 .water pump start auto .After running 60 minutes automatically turn off this function

Note:recycle pump/water pump/heater function control by water level, water shortage flash. When the water level to meet the requirements vill disappear.recycle pump/water pump/heter function run start normally.

(5) Air bubble function: Press air bubble (2) can start or close it. When start LCD

(6) Underwater lamp function: Underwater lamp will start when start water pump.also can press 👩 to start or close it.

- (7) O₃ function: Press an start or close it. When starts, LCD shows O₃, and lasts 30mins then closed by automatically
- (8) keyboard locking if didn't touch thekeyboard for 2mins keyboard will
- 2. Radio section: (1) Put the Radio antenna in the right place, press FM radio swich . LCD will show frequency of raido, the vollume DB will be increased from 0 to 08DB.
- ,Speaker has little sounds (2)press .LCD shows "TUN" .then press or to choose channels. If press if over 2 seconds, frequency will up or down by automatically, till get channels. If no good sigal or bad condition, we advise choose channels by hands. If get good channel please press memory key (4), It will shows in "--CH", means can keep thet channel in this key ,the most memory channels are 20. (Before keep channel memory must choose channel, or press just up or down).

Press for 3 seconds then be in AUTO channel selection, then system will search channels (87.5-108Mhz)

LCD will show the frequency you are searching. When search channel, LCD shows-- "01CH", mean system searchs the first channel, also memory it. Then system will search channels by automatically, till 20channels or all frequency. (The quantity of channels are according to your local frequency, this system can save 20 channels at most)Finished searching, system will come back and listen to the first channel.

Relisten step: press memory key 🖰 to choose channels.

press " press " go to "MP3" mode, connect USB with Mp3 tracks,

then press volume key to choose volume.

to select tracks

Play: press " 🔠 " to play or pause

Select tracks: first press " 🝙 ", then press " 🚇 " or " 😭

Press (19) to be into " "position of bluetooth, display show " 17 " and flash (search bluetooth sign) then system will search bluetooth. 17 7 "

and dash (search bluetooth sign) then system with search bluetooth.

stop flashing when finish pairing, mean connect success: At fisrt time must pairing bluetooth.

open bluetooth setting of phone → open bluetooth → search equiment → pairing → pairing success speaker broadcast a piece of music (finish pairing, phone bluetooth sign

7 stop flash) as helpow:



Play mobile phone music at bluetooth status:

open mobile phone music player and operating on the control panel:

play /pause :press to play or pause.

Select tracks: press , then press or to select tracks.


4. AUX: Connect the AUX input wire and electric cabinet wire press , to be in AUX position, then press volume key to choose vol.

5.Volume adjust: Press or can adjust VOL, LCD will show DB 6.OFF:press turn off all function,LCD show "OFF" .All system is off, if not use for long time .please cut off the power.

七、ATTENTIONS

- Qualified technician is requiried to install the system. The leakage protection switch should be installed in the right place which easy control.
- 2. When install ground wire must be strong, if not manufacture will not be respon-
- 3. The engineer should be installed steadily to the ground, out box must be strong 4. Please disconnect the main power switch if the unit not use for long time under
- standby mode 5. The load of power supply circuit should be considered when installing, or if
- may influence the normal work or for worst it may lead to accidents 6. Please consider all spare parts need be moisture proof when install.


• Waist drum shape three-piece set faucet:



A. cold water switch (Marked with letter C)

- B. waterfall/sprinkling style transferable switch (Marked with Icon) C. hot water switch (Marked with letter H)
- Multi-function handheld shower with back flow protector.

Press this switch to adjust the shower jet mode.





SHOWER HEAD INSTALLATION

Tmaking sure it lies flat.o install the shower head, follow the steps shown in Figure A

First, remove the hose connector from the shower holder. Then, insert the rubber gasket into the hose connector,

Finally, tighten the shower head and the hose connector securely. Water iets use:

Rotating the head of water jets clockwise/anticlockwise can adjust the water force; Turning the head of water jets up, down, left or right can adjust the angle of





Big water jets

Small water jets

Drainage 1.Manual drainage



Rotate the cover clockwise to close the drain

Rotate the cover anticlockwise to open the drain:

When the water is over the maximum water level, the excess water will be drained by overflow. When the tap is turned on, water is poured into the tub from under the handle.

Care and Maintenance

Regular bathtub maintenance will keep it clean and working at its best. Pump and pipe circulation systems should be fushed before frst use and on a monthly basis when product is under normal use. Below is the recommended cleaning procedure: 1.Do not run the jet massage system dry.

2.Fill the tub with hot water (about (40°C) 2–3 cm (0.9-1.2 inch) above the jets. Add 2–3 teaspoons of low foaming detergent, such as dishwashing machine detergent.

3. Turn on all the functions and run for 10 minutes.

4.Drain tub completely.

5. Fill tub with cold water above jets.

6. Turn on all the functions and run for 15 minutes.

7.Drain tub completely.

8.Clean the "suction cover" by removing any hair or lint.

Whirlpool Suction Cover/Strainer

- Maintain regular cleaning of the suction cover/strainer
- 1. Rotate the suction cover to the left to detach it
- 2 Remove any hair lint or dehris present on the cover and housing
- 3. Remember to reattach the cover in place.

WARNING! Please orient the cover/strainer with the small notch at the bottom. The gasket must be inserted into the groove of the cover/strainer before mounting it onto the suction ftting.

DANGER: RISK OF SEVERE INJURY OR DROWNING!

- . Keep hair a minimum of 6 inches (152 mm) away from the suction ftting at all times when the whirlpool system is operating. Individuals with shoulder-length hair should secure it close to their heads or wear a bathing cap.
- Do not operate the Whirlpool system with the suction cover/strainer removed! It is a safety device and must always be in place on the suction fitting to minimize the potential hazard of hair and body entrapment.

must empty the bathtub and the water in the pipe during winter use. If the pipes freeze, the pipes could rupture or equipment could become damaged.

Use no water other than standard tap water. The use of well water could cause corrosion, which could lead to leaks.



The bathtub should not be exposed to ultraviolet or bright light. otherwise aging could be accelerated, causing damage.

Keep the bathtub away from cigarette butts, hair dryers, and other heat sources, otherwise the product may be damaged due to high temperature deformation

When not in use, please keep the bathtub well-ventilated and dry; avoid contact with corrosive substances: cut off electricity and cut off water supply

To avoid other damage, please do not drop or strike the bathtub with hard objects. Doing so could crack or scratch the bathtub or cause leaks that damage or ruin household property.

When the product is at work, you cannot cut off any connection lines and split the bus master and control panel. Any part of the control panel and the bus master CAN NOT be split by the user. Doing so may cause product leakage, electric shock, or other accidents.

The ground fault circuit interrupter (GFCI) should be tested regularly. It is ideal to test before each use.




Use water or mild detergent to clean the product. Do not use acids, alkalis, chemical organic solvents, or acidic/alkaline cleaning agents. Otherwise, the bathtub will experience surface damage. When water or a neutral detergent cannot remove stains, use a clean cloth with a little alcohol to remove stains.

Plating parts maintenance: use cotton fabric to scrub.

Light scratches and dulled areas may be restored to original luster by coarse grinding using NO. 1200 waterproof sandpaper dipped in water. Then fne grind by using NO. 2000 waterproof sandpaper dipped in water. Finally, polish with a soft cloth and a polishing agent.

When not in use, please keep the bathtub well-ventilated and dry: avoid contact with corrosive substances; cut off electricity and cut off water supply














Empava® APPLIANCES

PROOF OF PURCHASE IS REQUIRED TO OBTAIN WARRANTY SERVICE.

Please have the following information available when you call/ email the Empava Customer Center:

- Proof of purchase (PO# or screenshot of order confrmation)
- · Model number and serial number A clear and comprehensive description of the issue

IF YOU NEED SERVICE: Empava Customer Center Email: support@empava.com Address: 15253 Don Julian Rd, City of Industry, CA 91745

Website: https://empava.com Call: 888-682-8882 Monday - Friday from 9am - 5pm PST

Empaya® APPLIANCES WARRANTY

WHAT IS COVERED

WHAT IS NOT COVERED

TWO YEARS WARRANTY (PARTS)

Empava offers a two-year warranty on parts for the received actegories: induction cooktop, gas cooktop, electrical oven, pizza oven, fre glass, juicer, range hood, wine cooler, beverage 3. In-home Instruction on how to use your product.

3. Service to correct improper product maintenance or the control of the cookies of the programme with electric

TWO YEARS WARRANTY (PARTS & LABOR)

the following categories: gas oven and gas range.

THREE YEARS WARRANTY (PARTS & LABOR)

Empava provides a three-year warranty on both parts and labor 6. Damage from accident, misuse, abuse, fre, foods, acts of for the following categories: freestanding tub, massage tub, and God or use with products not approved by Empava. walk-in tub.

This limited warranty is valid for products that are either purchased brand new from an authorized Empava dealer or

8. Cosmetic damage including scratches, dents, chips, and directly from Empaya.

The effective date of the warranty commences from the installed, operated, and maintained in accordance with the any defects in materials and workmanship that were present at the time of purchase. Alternatively, at its sole discretion, at the time of purchase at the time of purchase at the time of purchase. Alternatively, at its sole discretion, at the time of purchase at the time of purchase. Alternatively, at its sole discretion, at the time of purchase at the time of purchase. replacement, the warranty for the replacement product shall be valid for the very little of the very little Empava may replace the product. In the event of product be valid for the remaining term of the original warranty period.

DISCLAIMER OF IMPLIED WARRANTIES

IMPLIED WARRANTIES. INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO ONE YEAR OR THE SHORTEST PERIOD ALLOWED BY LAW. Some states and provinces do not allow limitations on the duration of implied warranties of merchantability or ftness, so this limitation may not apply to you. This warranty gives you specify legal rights, and you also may have other rights that vary from state to state or province to province.

DISCLAIMER OF REPRESENTATIONS OUTSIDE OF WARRANTY

If you want a longer or more comprehensive warranty than the limited warranty that comes with this major appliance, you should ask Empava or your retailer about buying an extended warranty.

LIMITATION OF REMEDIES: EXCLUSION OF INCIDENTAL AND CONSEQUENTIAL DAMAGES •

HEREIN. EMPAVA SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so these limitations and exclusions may not apply to you. This warranty gives you specifc legal rights, and you also may have other rights that vary from state to state or province to province.

- 1. Commercial, non-residential or multiple-family use, or use Empava offers a two-year warranty on parts for the following inconsistent with published user, operator or installation
- installation, installation not in accordance with electrical or plumbing codes or correction of household electrical or Empava offers a two-year warranty on both parts and labor for plumbing (i.e., house wiring, fuses or water inlet hoses).
 - 4. Defects or damage caused by the use of non-genuine Empaya parts or accessories
 - 5. Conversion of your product from natural gas or L.P. gas.
 - 7. Repairs to parts or systems to correct product damage or defects caused by unauthorized service, alteration or modification of the appliance.
 - other damage to appliance fnishes unless such damage results from defects in materials and workmanship and is reported to Empava within 30 days.
- user manual, Empava will provide parts at no cost to rectify any defects in materials. exposure to chemicals.

 - cabinetry, islands, countertops, drywall, etc.) that interfere with servicing, removal or replacement of the product.

WARNING!
CALIFORNIA RESIDENTS Cancer and Reproductive Harm

AVERTISSEMENT!
RÉSIDENTS DE CALIFORNIE Cancer et Dommages à la Reproduction

¡ADVERTENCIA! RESIDENTES DE CALIFORNIA Cáncer y Daño Reproductivo

www.P65Wamings.ca.gov



EMPAVA APPLIANCES INC. 458 Parriott Place West, City of Industry, California 91745, United States TEL:626-888-2888 WWW.EMPAVA.COM